


UHF Ceramic Anti-metal RFID Tag - BRT-34

BRT-34 is a high temperature resistant anti-metal UHF RFID tag specially designed to deal with complex environments such as metal and high temperature. It has the characteristics of long reading distance, high sensitivity, and convenient installation.

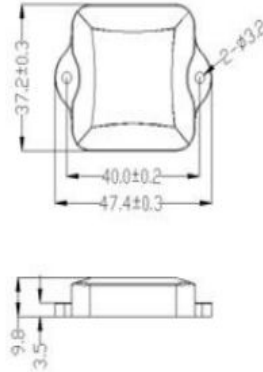

Tech Specs

Operating frequency	920 - 925 MHz	
Chip	Alien H3	Impinj Monza R6 - P
Sensitivity	-17dBm	
EPC	96 bits, extensible to 496 bits	128 bits
User memory	512 bits	32 bits
TID	64 bits	96 bits
Protocol	ISO 18000-6C, EPC global C1Gen2	
Function	Readable and writable	

Physical Characteristics

Dimensions	48mm x 38mm x 10mm	
Weight	about 10g	
Housing material	High temperature resistant material	
Operating temperature	-40°C to +200°C	
Ingress protection	IP68	